



BROKIS®

CM12195

KNOT

CILINDRO TABLE - PC1078



Download

COMPONENTS OF PACKAGING:

1x assembled light
1x Ehmann dimmer
1x cotton gloves
1x installation manual
1x size 6 hex key

WARNING:

Installation must be carried out by a qualified electrician only.

Switch off power at main circuit panel prior to installation!

The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.

Instalation time: 10 minutes / 1 person



BROKIS®

BROKIS S.R.O.
ŠPANIELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS applies the highest possible quality standards in manufacturing its lights. Prior to shipping, each light undergoes several quality controls and stages of cleaning. Lights may require additional cleaning as a result of transportation, storage, and the amount of time that passes between packing in our plant and subsequent unpacking by the client. Therefore, we emphasize cleaning the lights prior to installation.

The glass must first be rinsed in hot water, with a dilution of a dish-detergent used to remove all foreign particles and dust. Eventually repeat this basic treatment, if necessary. Afterwards the glass must have a second cleaning using hot water, with a dilution of a de-greaser (such as ammonia or vinegar). The glass must then be thoroughly rinsed with running hot water. Eventually repeat this treatment, if necessary. The glass is then thoroughly dried with a paper towel or a clean soft cotton towel. Only re-assemble the glass to the lamp body, when completely cooled down.


Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Also: do not use products, containing silicones – since they will rapidly attract more dust and grease.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.



1. SWITCHING ON THE LIGHT


Plug the power cable into an electrical outlet and ensure the light works properly.

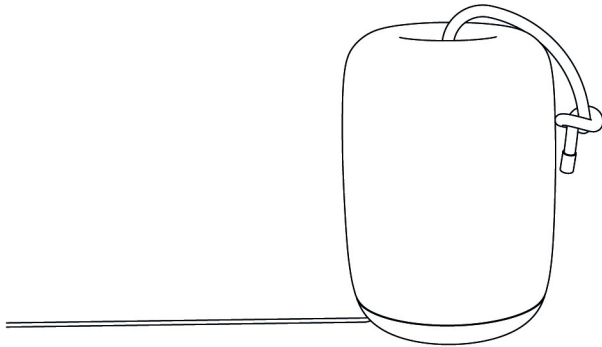

2. CLEANING/DIASSEMBLING AND REMOVING THE GLASS 1/3


Always unplug the light before cleaning the internal parts.

Place the light on a soft surface to prevent damage to the glass. Use the size 6 hex key to remove the screw (M10) in the bottom of the light. Next, lift up the metal cover. Put the screw back in the hole and turn it three or four times. You can now use the screw to hold the heat sink with light source in an upright position.

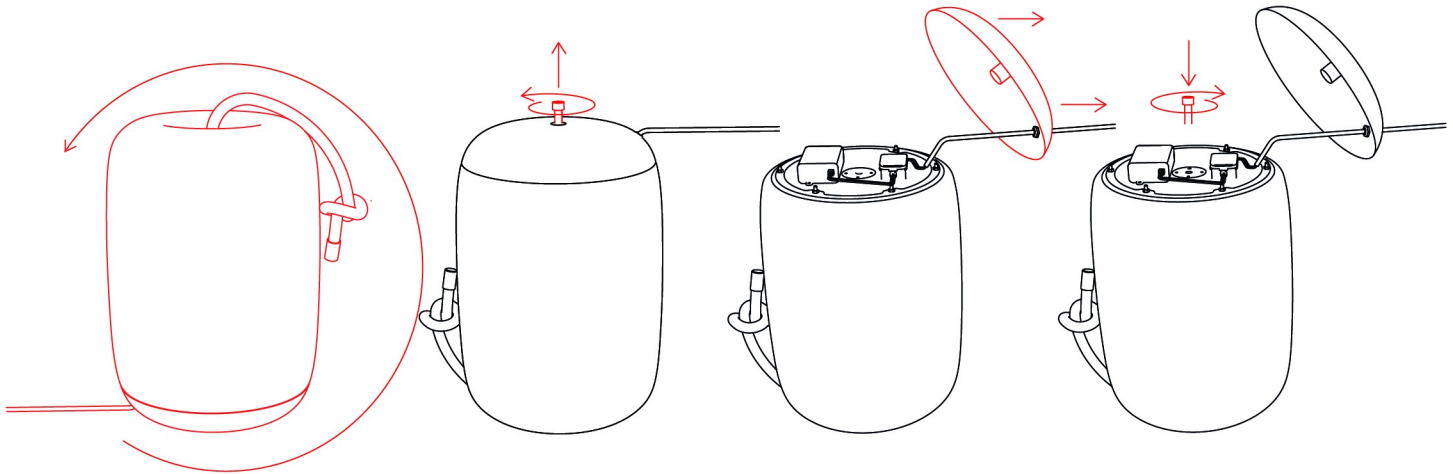

3. CLEANING / DIASSEMBLING AND REMOVING THE GLASS 2/3

Unscrew the M4 nuts from around the heat sink and remove the stainless steel ring. Do not let go of the centre screw. Doing so may result in damage!

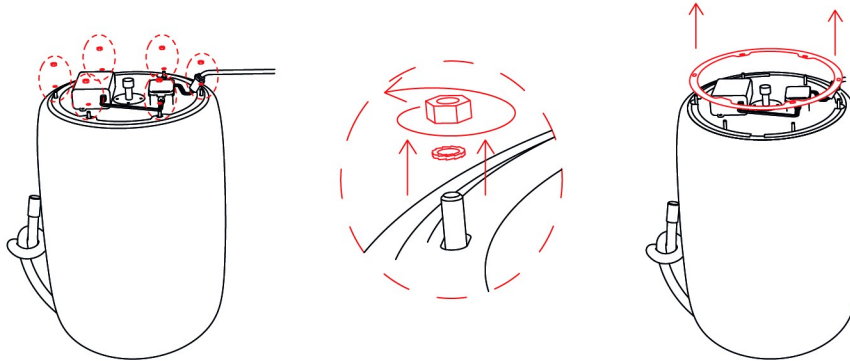

4. CLEANING / DIASSEMBLING AND REMOVING THE GLASS 3/3

Lower the released light source into the glass shade, turn 90 degrees until vertical, and then gently pull it up through the cutouts in the rim of the glass shade.

After cleaning the glass, reassemble the light by reversing the above steps.

