



# MONA

WALL S, M - PC969, PC970

### INSTALLATION MANUAL

#### **MONA SMALL**

Wall light



#### COMPONENTS INCLUDED WITH UNIT:

1x glass shade with light source

- 1x metal body
- 1x wall bracket
- 3x terminal connectors
- 2x hex screws (M5)
- 1x hex key
- 1x cotton gloves
  1x installation manual

#### **WARNING:**

Installation must be carried out by a qualified electrician only.

Switch off power at main circuit panel prior to installation!

The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.

Installation time: 30 minutes / 1 person



BROKIS S R O ŠPANIELOVA 1315/25 163 00 PRAHA 6 - ŘEPY CZECH REPUBLIC

ORG ID 64940799 VAT ID CZ64940799 C 42174 MĚSTSKÝ SOUD **V PRAZE** 

TEL +420 567 211 517 TECHNICAL@BROKIS.CZ INFO@BROKIS.CZ WWW.BROKIS.CZ

## INSTALLATION MANUAL

#### **MONA SMALL**

Wall light



#### **CLEANING THE GLASS**

BROKIS applies the highest possible quality standards in manufacturing its lights. Prior to shipping, each light undergoes several quality controls and stages of cleaning. Lights may require additional cleaning as a result of transportation, storage, and the amount of time that passes between packing in our plant and subsequent unpacking by the client. Therefore, we emphasizes cleaning the lights prior to installation.

The glass must first be rinsed in hot water, with a dilution of a dish-detergent used to remove all foreign particles and dust. Eventually repeat this basic treatment, if necessary. Afterwards the glass must have a second cleaning using hot water, with a dilution of a de-greaser (such as ammonia or vinegar). The glass must then be thoroughly rinsed with running hot water. Eventually repeat this treatment, if necessary. The glass is then thoroughly dried with a paper towel or a clean soft cotton towel. Only re-assemble the glass to the lamp body, when completely cooled down.


Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Also: do not use products, containing silicones – since they will rapidly attract more dust and grease.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.




#### 1. INSTALLING THE WALL BRACKET

With regard to various types of walls, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation or defects in the material to which the bracket is secured. Pass the power cable through one of the holes in the bracket and then use anchors of sufficient strength (not included) to secure the bracket to the wall.




#### 2. CONNECTING THE LIGHT TO THE BUILDING WIRING

Connect the light to the building wiring according to the connection diagram.

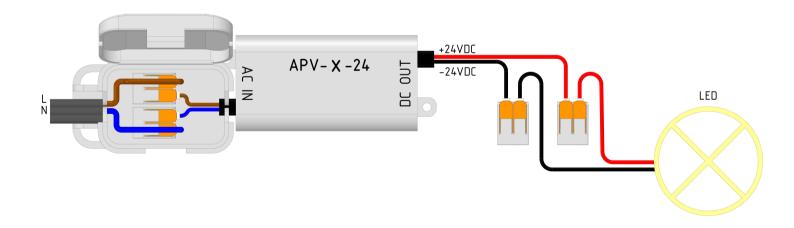

#### 3. **INSTALLING THE LIGHT**

Position the light on the bracket and use the two hex screws and the hex key to secure it in place. Tighten the screws so that they are concealed within body of the light.

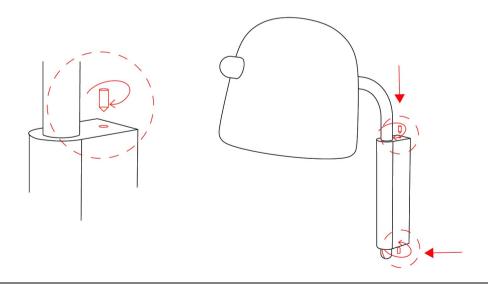

#### 4. SWITCHING ON THE LIGHT

Restore power at the main circuit panel and verify that the light works properly.

